





**Output Plug and Polarity are Dependent on Customer Requirements**

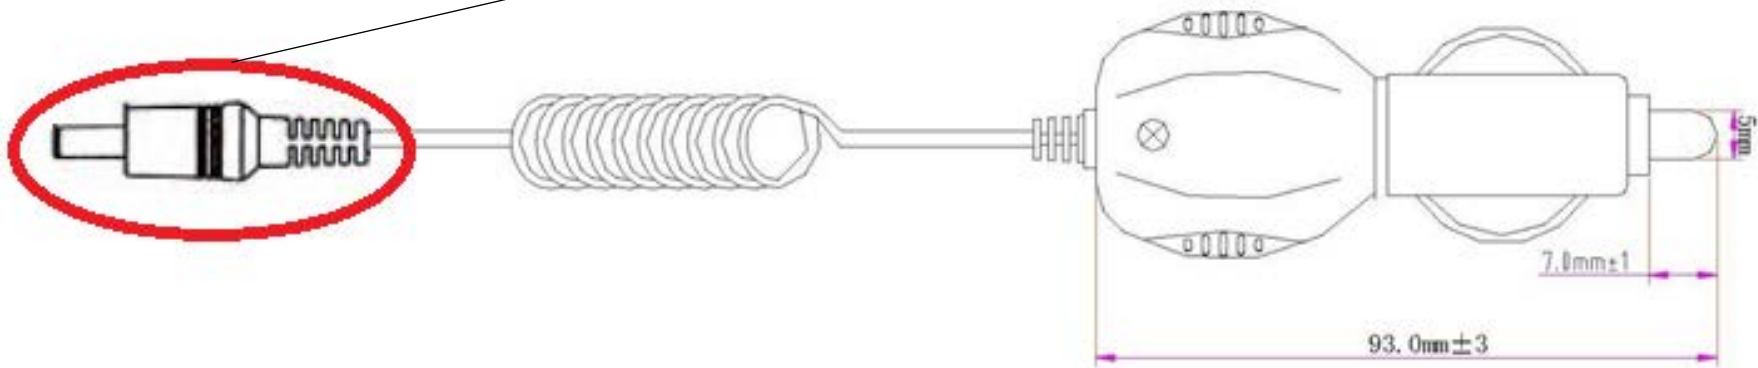

**General Specifications**

- Input: 12~24VDC
- Input Fuse: 3A/250V
- Output: +5.0VDC/0~2000mA Regulated
- DC Cord: Coiled 4.9FT, 22AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+55°C
- Operating Humidity/Storage Temp: 30%~95%RH/ 30%~98%
- Approvals: E-MARK/WEEE
- Unit Weight: 0.20 lbs
- Carton Quantity: 120 pcs

<b>ITEM NO.</b>	CC-5V0-2A0	<b>PART TITLE</b>	Energy Efficient 5 VDC / 2.0A DC – DC Converter
<b>PART NO.</b>	CC-5V0-2A0	 <b>CONDOR ELECTRONICS, INC.</b> T: 408-745-7141 F: 408-745-0439 990 San Antonio Road Palo Alto, CA 94303 USA <a href="mailto:sales@condorelectronics.net">sales@condorelectronics.net</a>	
<b>DATE</b>	1.06.2016		
<b>APPROVAL</b>	CB		
<b>UNIT</b>	mm		
<b>REV</b>	0		