





Output Plug and Polarity are Dependent on Customer Requirements

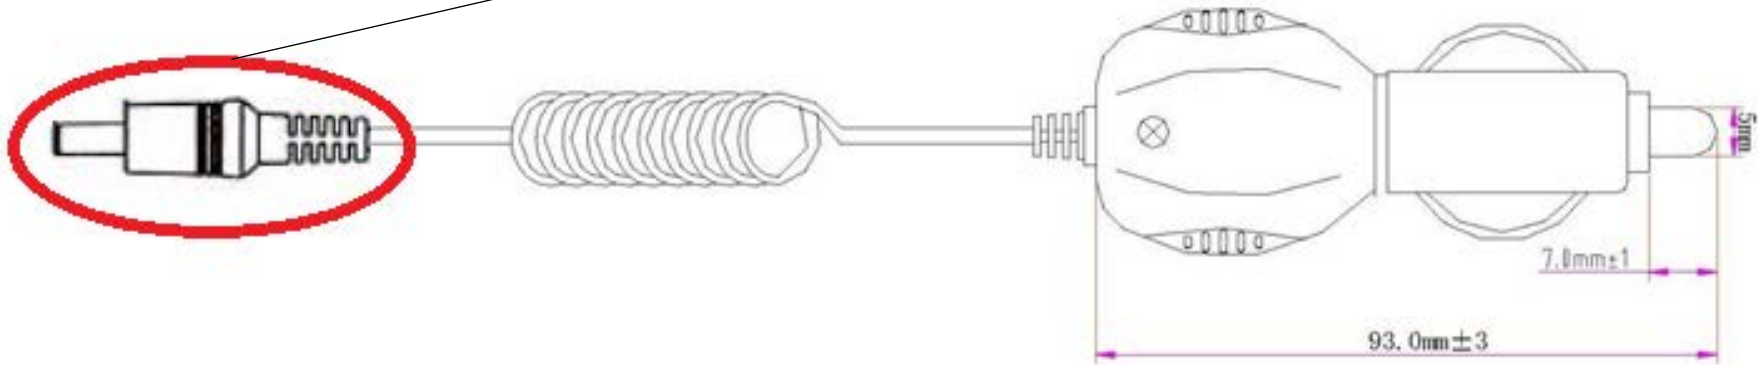

General Specifications

- Input: 12~24VDC
- Input Fuse: 3A/250V
- Output: +5.0VDC/0~2000mA Regulated
- DC Cord: Coiled 4.9FT, 22AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+55°C
- Operating Humidity/Storage Temp: 30%~95%RH/ 30%~98%
- Approvals: E-MARK/WEEE
- Unit Weight: 0.20 lbs
- Carton Quantity: 120 pcs

ITEM NO.	CC-5V0-2A0	PART TITLE	Energy Efficient 5 VDC / 2.0A DC – DC Converter
PART NO.	CC-5V0-2A0	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	1.06.2016		
APPROVAL	CB		
UNIT	mm		
REV	0		