




Tolerance is
± .2MM
unless
otherwise
specified.

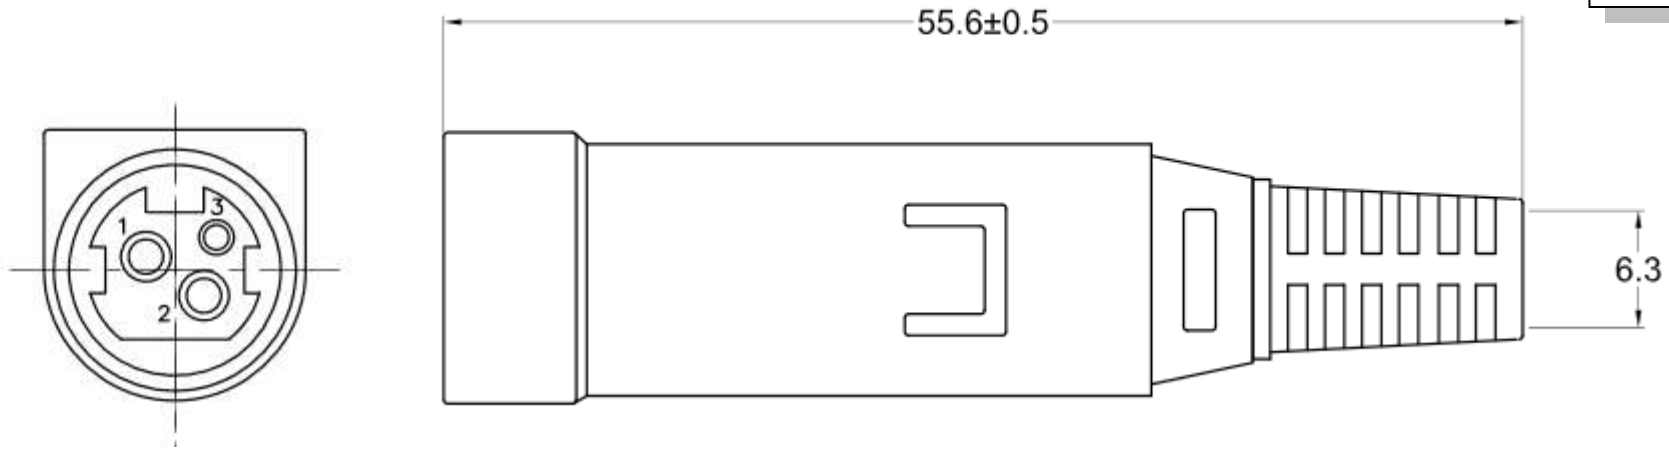

- Contact Rating: 24V / 7.5A max
- Insulation Resistance: 50m min at 250V DC
- Dielectric Withstanding Voltage: AC 500V RMS for 1 min
- Contact Resistance: 30 milliohms Max
- Operating Temp: -40°C ~ 85°C

Mating Receptacle Options for KPJX-3S
1. KPPX-3P (3Pin Locking Plug)

PART NO.	KPJX-3S
DATE	12.11.2014
APPROVAL	CB
UNIT	mm
REV	0

PART TITLE	DC 3 Pin Cable mount receptacle
 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	