




Tolerance is
± .2MM
unless
otherwise
specified.

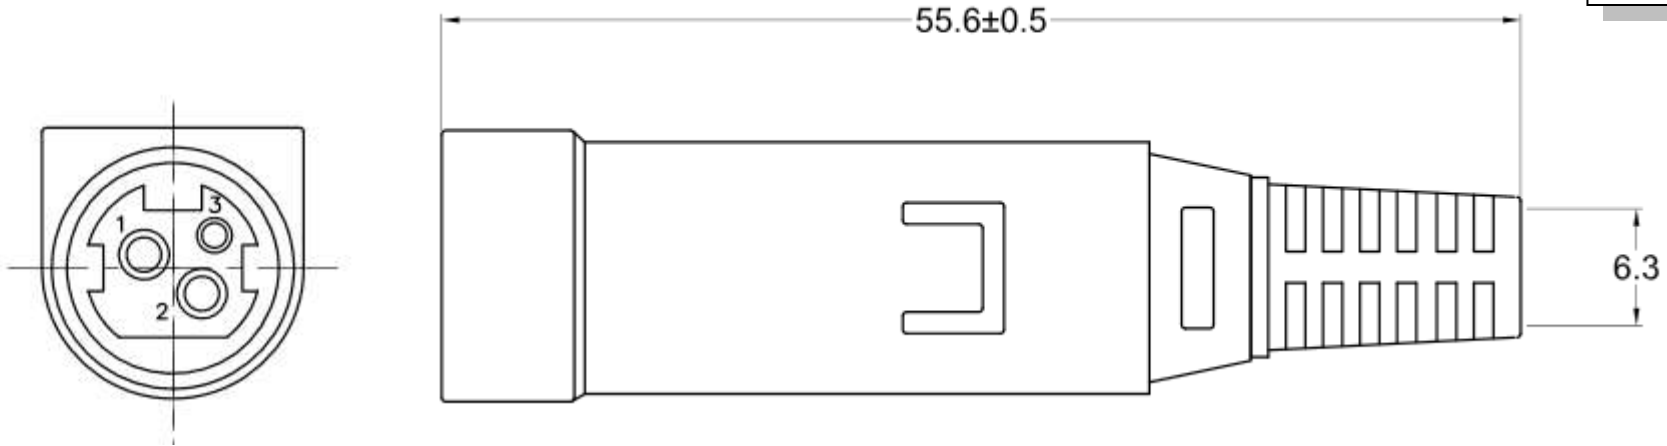

Contact Rating: 24V / 7.5A max

Insulation Resistance: 50m min at 250V DC

Dielectric Withstanding Voltage: AC 500V RMS for 1 min

Contact Resistance: 30 milliohms Max

Operating Temp: -40°C ~ 85°C

Mating Receptacle Options for KPJX-3S

- 1. KPPX-3P (3Pin Locking Plug)

PART NO.	KPJX-3S
DATE	12.11.2014
APPROVAL	CB
UNIT	mm
REV	0

PART TITLE	DC 3 Pin Cable mount receptacle
-------------------	--



CONDOR ELECTRONICS, INC.
 T: 408-745-7141 F: 408-745-0439
 990 San Antonio Road
 Palo Alto, CA 94303 USA
sales@condorelectronics.net