




Tolerance is
± .2MM
unless
otherwise
specified.

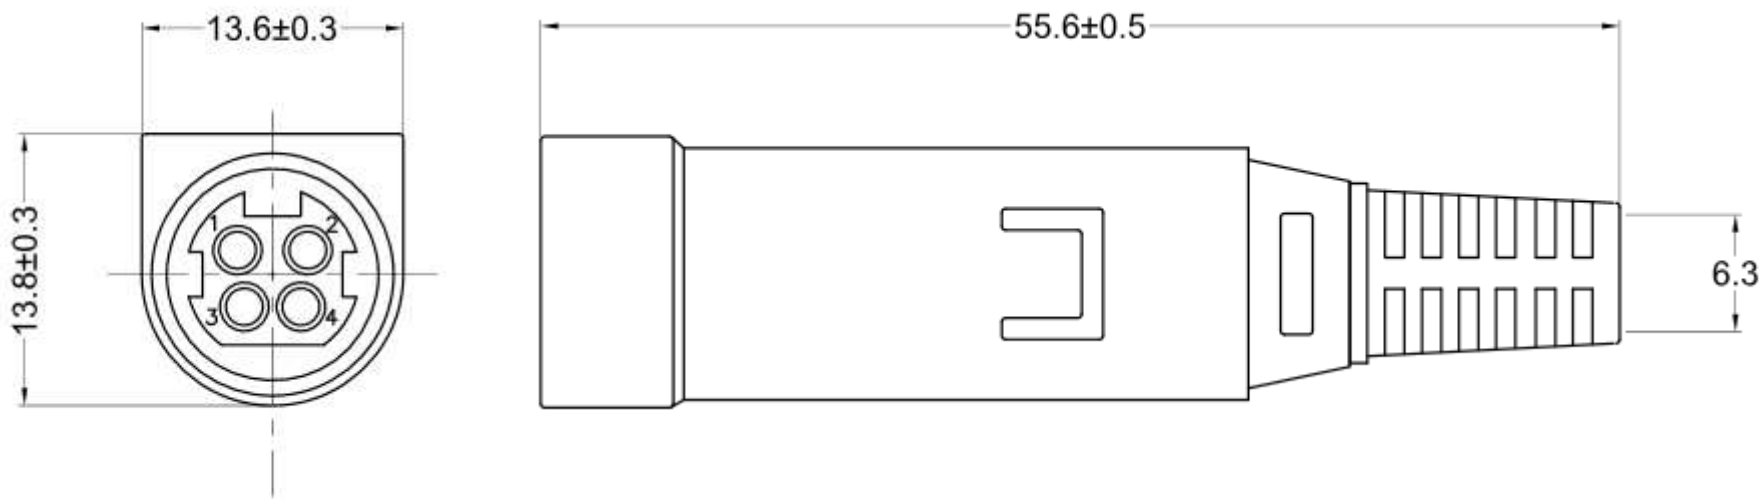

Contact Rating: 24V / 7.5A max
Insulation Resistance: 50m min at 250V DC
Dielectric Withstanding Voltage: AC 500V RMS for 1 min
Contact Resistance: 30 milliohms Max
Operating Temp: -40°C ~ 85°C

Mating Receptacle Options for KPJX-4S-CM
1. KPPX-4P (4Pin Locking Plug)

PART NO.	KPJX-4S-CM
DATE	12.11.2014
APPROVAL	CB
UNIT	mm
REV	0

PART TITLE	DC 4 pin Cable mount receptacle
-------------------	--



CONDOR ELECTRONICS, INC.
 T: 408-745-7141 F: 408-745-0439
 990 San Antonio Road
 Palo Alto, CA 94303 USA
sales@condorelectronics.net