




Tolerance is  
± .2MM  
unless  
otherwise  
specified.

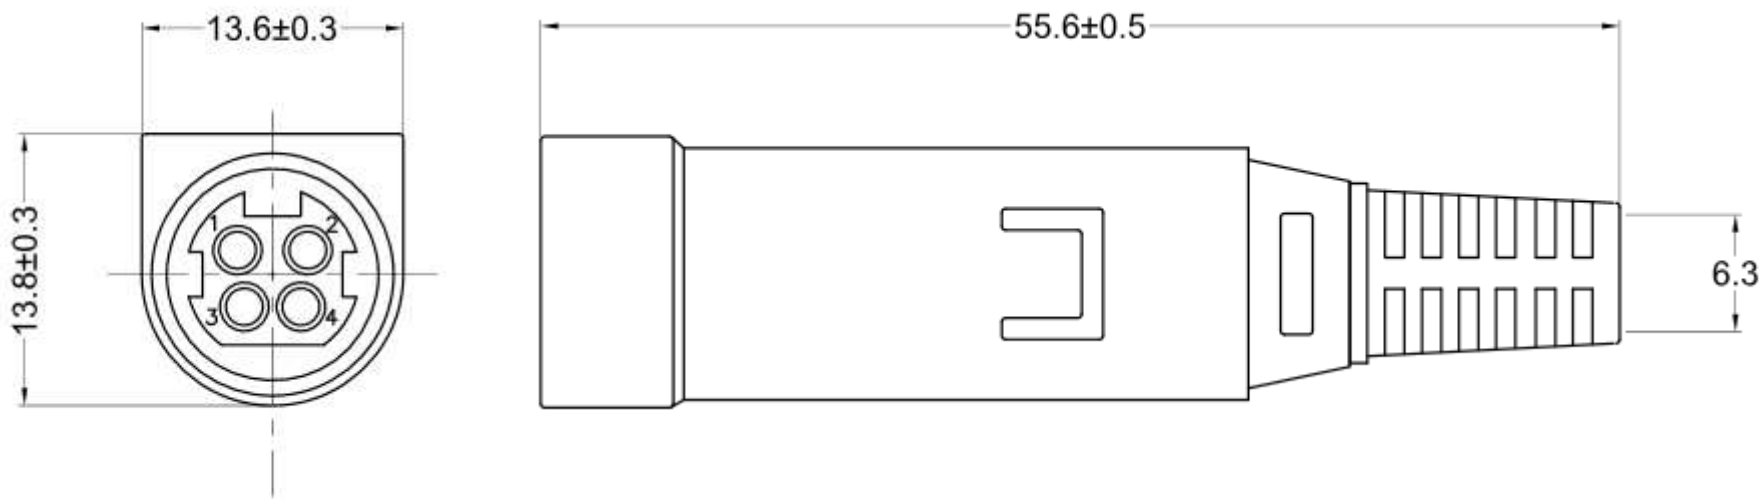

**Contact Rating: 24V / 7.5A max**  
**Insulation Resistance: 50m min at 250V DC**  
**Dielectric Withstanding Voltage: AC 500V RMS for 1 min**  
**Contact Resistance: 30 milliohms Max**  
**Operating Temp: -40°C ~ 85°C**

<b>Mating Receptacle Options for KPJX-4S-CM</b>
1. KPPX-4P (4Pin Locking Plug)

<b>PART NO.</b>	<b>KPJX-4S-CM</b>
<b>DATE</b>	<b>12.11.2014</b>
<b>APPROVAL</b>	<b>CB</b>
<b>UNIT</b>	<b>mm</b>
<b>REV</b>	<b>0</b>

<b>PART TITLE</b>	<b>DC 4 pin Cable mount receptacle</b>
-------------------	--



**CONDOR ELECTRONICS, INC.**  
 T: 408-745-7141 F: 408-745-0439  
 780 Montague Expy. Ste. 406  
 San Jose, CA 95131 USA  
[sales@condorelectronics.net](mailto:sales@condorelectronics.net)