

US



AUS




BSI



EURO

Output Plug and Polarity are Dependent on Customer Requirements

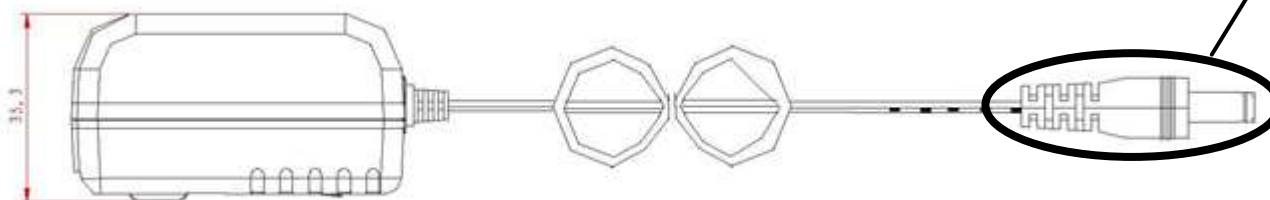


General Specifications

- Input: 100~240Vac/ 50~60Hz
- Output: +6VDC/0~1250mA Regulated
- DC Cord: 6 FT, 20 AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+80°C
- Operating/Storage Humidity: 5%~90%RH
- Approvals: UL/CUL/FCC/LPS/BSMI/PSE/CCC/RCM/KC/IRAM/TUV-GS,BS/CE/WEEE/ROHS/VI
- Meets Energy Efficiency Level VI Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .19 lb
- Carton Quantity: 50 pcs


White Inner Box Dimensions

Full Set




100 x 55 x 87mm

Individual Interchangeable Plug



80 x 65 x 45mm

ITEM NO.	S-6V0-1A2-P30	PART TITLE	Energy Efficient Interchangeable Plug 6 VDC / 1.2A Universal Input Power Supply
PART NO.	S6-061A2P	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	5.02.2016		
APPROVAL	TN		
UNIT	mm		
REV	0		