


Output Plug and Polarity are Dependent on Customer Requirements

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +12VDC/0~11000mA Regulated
- DC Cord: 3.9FT, 16AWG With Ferrite
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+55°C
- Operating Humidity: 5%~90%RH
- M.T.B.F.: 50,000 Hrs. Minimum (25°C Ambient Temp., Full Load)
- Approvals: UL/CUL/FCC/PSE/CCC/RCM/IRAM/BS/TUV/WEEE/ROHS/VI
- Meets Energy Efficiency Level VI Standards/ ErP Stage 2
- Protection: Over Voltage/Short Circuit
- Unit Weight: ≈1 lbs
- Carton Quantity: 30 pcs

Inner Box Dimensions

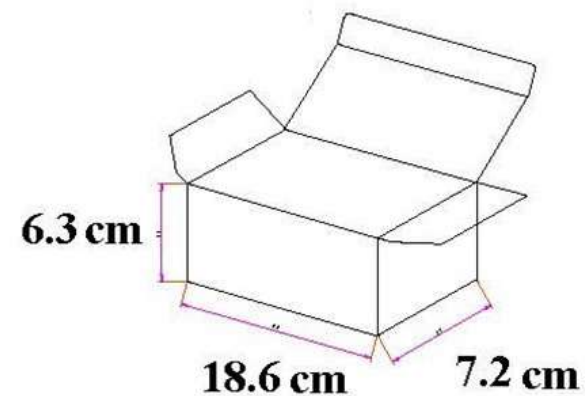

ITEM NO.	S-12V0-11A0-IDG30	PART TITLE	Energy Efficient 12 VDC / 11.0A Universal Input Power Supply
PART NO.	S6-1211A0I	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	10.04.2017		
APPROVAL	WS		
UNIT	mm		
REV	0		