



Output Plug and Polarity are Dependent on Customer Requirements

General Specifications

- Input: 100~240Vac/ 50~60Hz
- Output: +12VDC/0~1600mA Regulated
- DC Cord: 5 FT, 20 AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+80°C
- Operating/Storage Humidity: 5%~90%RH
- Approvals: CB/UL/CUL/FCC/LPS/BSMI/RCM/CCC/GS/CE/WEEE/NRCAN/ROHS/VI
- Meets Energy Efficiency Level VI Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .37 lb
- Carton Quantity: 60 pcs

White Inner Box Dimensions

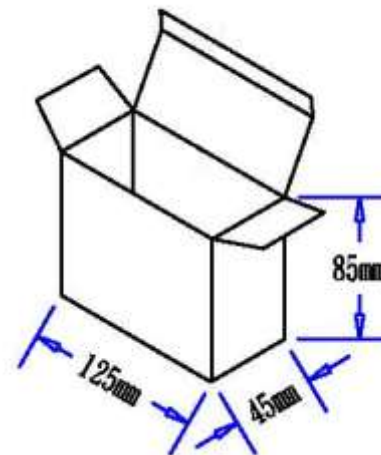

| | | | |
|-----------------|------------------|---|---|
| <i>ITEM NO.</i> | S-12V0-1A6-IDG30 | <i>PART TITLE</i> | Energy Efficient 12 VDC / 1.6A Universal Input Power Supply |
| <i>PART NO.</i> | S6-121A6I |  CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 990 San Antonio Road Palo Alto, CA 94303 USA sales@condorelectronics.net | |
| <i>DATE</i> | 6.6.2016 | | |
| <i>APPROVAL</i> | TN | | |
| <i>UNIT</i> | mm | | |
| <i>REV</i> | 1 | | |