



Output Plug and Polarity are Dependent on Customer Requirements

### General Specifications

- Input: 100~240Vac/ 50~60Hz
- Output: +12VDC/0~1600mA Regulated
- DC Cord: 5 FT, 20 AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+80°C
- Operating/Storage Humidity: 5%~90%RH
- Approvals: CB/UL/CUL/FCC/LPS/BSMI/RCM/CCC/GS/CE/WEEE/NRCAN/ROHS/VI
- Meets Energy Efficiency Level VI Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .37 lb
- Carton Quantity: 60 pcs

White Inner Box Dimensions

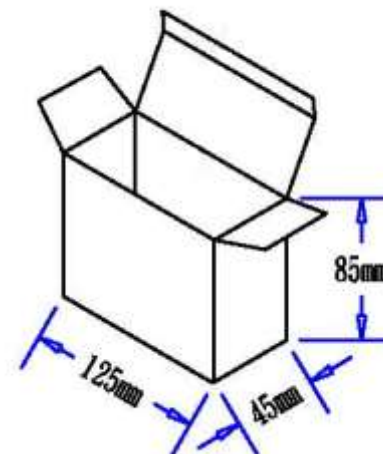

ITEM NO.	S-12V0-1A6-IDG30	PART TITLE	Energy Efficient 12 VDC / 1.6A Universal Input Power Supply
PART NO.	S6-121A6I	 <b>CONDOR ELECTRONICS, INC.</b> T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA <a href="mailto:sales@condorelectronics.net">sales@condorelectronics.net</a>	
DATE	6.6.2016		
APPROVAL	TN		
UNIT	mm		
REV	1		