


Output Plug and Polarity are Dependent on Customer Requirements

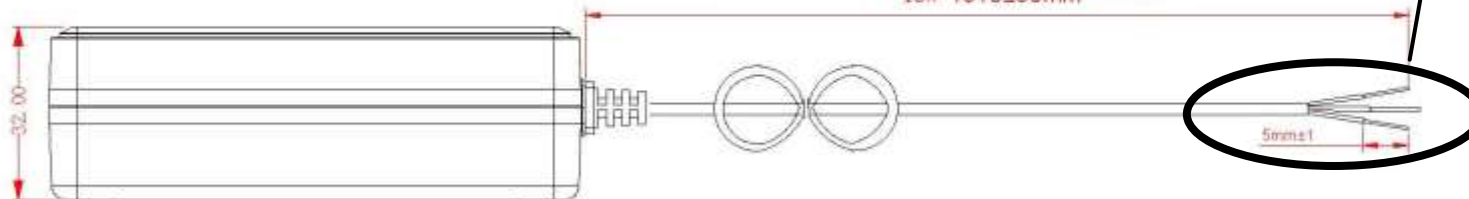


5mm 2464 OD6.0 1800±50mm
18# 1910±50mm

General Specifications

- Input: 100~240Vac/ 50~60Hz
- Output: +12VDC/0~2000mA Regulated
- DC Cord: 6 FT, 18 AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+70°C
- Operating/Storage Humidity: 5%~90%RH
- Approvals: UL/CUL/FCC/LPS/PSE/CCC/RCM/IRAM/BRAZIL/TUV-GS,BS/CE/WEEE/ROHS/VI
- Meets Energy Efficiency Level VI Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .30 lb
- Carton Quantity: 20 pcs

Inner Box Dimensions



186 x 72 x 101mm

ITEM NO.	S-12V0-2A0-IDFG-30	PART TITLE	Energy Efficient 12 VDC / 2A Universal Input Power Supply
PART NO.	S6-122A0I-3W-GBW	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	06.30.2016		
APPROVAL	TN		
UNIT	mm		
REV	0		