

US




AUS



BSI



EURO

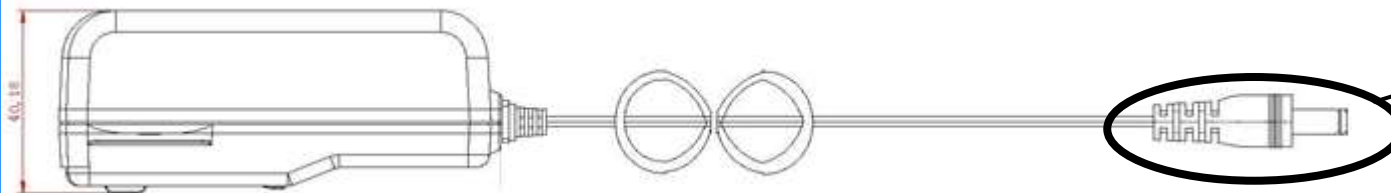


Output Plug and Polarity are Dependent on Customer Requirements

General Specifications

- Input: 100~240Vac/ 50~60Hz
- Output: +12VDC/0~3000mA Regulated
- DC Cord: 4.9 FT, 18 AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+80°C
- Operating/Storage Humidity: 5%~90%RH
- Approvals: UL/CUL/FCC/LPS/TUV-GS,BS/CE/RCM/PSE/KC/CCC/IRAM/EAC/BRAZIL/WEEE/ROHS/VI
- Meets Energy Efficiency Level VI Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: 0.56 lb
- Carton Quantity: 36 pcs

White Inner Box Dimensions



170 x 68 x 54mm

ITEM NO.	S-12V0-3A0-P30	PART TITLE	Energy Efficient Interchangeable Plugs 12 VDC / 3A Universal Input Power Supply
PART NO.	S6-123A0P	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 990 San Antonio Road Palo Alto, CA 94303 USA sales@condorelectronics.net	
DATE	10.15.2018		
APPROVAL	WES		
UNIT	mm		
REV	0		