



**Output Plug and Polarity are Dependent on Customer Requirements**

### General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +18VDC/0~1000mA Regulated
- DC Cord: 5 FT, 20AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+70°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~90%RH
- Approvals: UL/CUL/FCC/LPS/PSE/BSMI/RCM/TUV/CE/WEEE/ROHS/VI
- Meets Energy Efficiency Level VI Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .55 Lbs
- Carton Quantity: 60 Pcs
- Interchangeable Input Plugs Available As A Set  
Or Sold Individually (Country Specific).

**Inner Box Dimensions:**

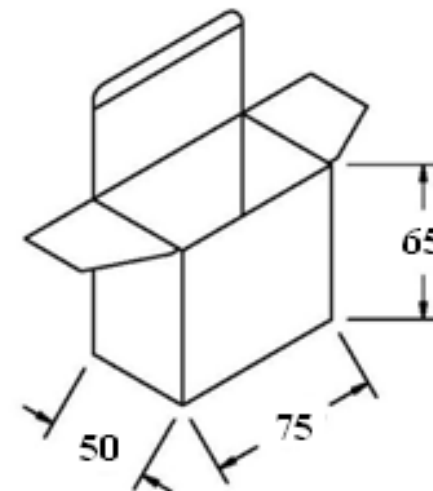

<b>ITEM NO.</b>	S-18V0-1A0-P30	<b>PART TITLE</b>	Energy Efficient 18 VDC / 1.0A Universal Input Power Supply
<b>PART NO.</b>	S6-181A0P	 <b>CONDOR ELECTRONICS, INC.</b> T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
<b>DATE</b>	02.16.2018		
<b>APPROVAL</b>	WS		
<b>UNIT</b>	mm		
<b>REV</b>	0		