


Output Plug and Polarity are Dependent on Customer Requirements

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +9VDC/0~1700mA Regulated
- DC Cord: 6 FT, 20 AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+70°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~95%RH
- Approvals: UL/CUL/FCC/LPS/PSE/BSMI/CCC/RCM/TUV/CE/WEEE/ROHS/VI
- Meets Energy Efficiency Level VI Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .53 lbs
- Carton Quantity: 60 pcs
- Interchangeable Input Plugs Sold As A Set or Individually (Country Specific)
- Build to Order

Inner Box Dimensions

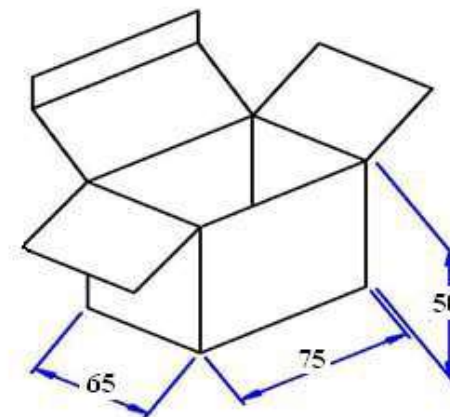

ITEM NO.	S-9V0-1A7-U30	PART TITLE	Energy Efficient 9 VDC / 1.2A Universal Input Power Supply
PART NO.	SA-091A7P	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 990 San Antonio Road Palo Alto, CA 94303 USA sales@condorelectronics.net	
DATE	12.17.2015		
APPROVAL	CB		
UNIT	mm		
REV	0		