



**Output Plug and Polarity are Dependent on Customer Requirements**

### General Specifications

- **Input:** 100~240Vac/ 47~63Hz
- **Output:** +9VDC/0~1700mA Regulated
- **DC Cord:** 6 FT, 20 AWG
- **Operating/Storage Temperature:** 0°C ~+40°C/ -10°C~+70°C
- **Operating/Storage Humidity:** 20%~80%RH/ 10%~95%RH
- **Approvals:** UL/CUL/FCC/LPS/PSE/BSMI/CCC/RCM/TUV/CE/WEEE/ROHS/VI
- **Meets Energy Efficiency Level VI Standards**
- **Protection:** Over Voltage/Short Circuit
- **Packaged Unit Weight:** .53 lbs
- **Carton Quantity:** 60 pcs
- **Interchangeable Input Plugs Sold As A Set or Individually (Country Specific)**
- **Build to Order**

### Inner Box Dimensions

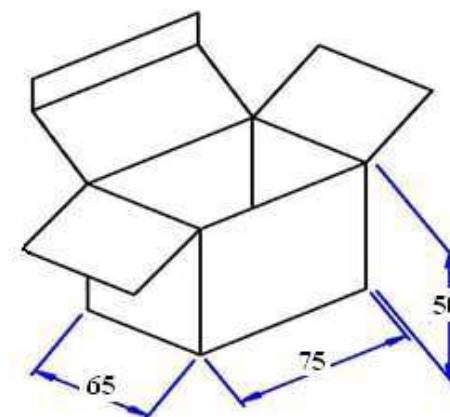

<b>ITEM NO.</b>	S-9V0-1A7-U30	<b>PART TITLE</b>	Energy Efficient 9 VDC / 1.2A Universal Input Power Supply
<b>PART NO.</b>	SA-091A7P	 <b>CONDOR ELECTRONICS, INC.</b> T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA <a href="mailto:sales@condorelectronics.net">sales@condorelectronics.net</a>	
<b>DATE</b>	12.17.2015		
<b>APPROVAL</b>	CB		
<b>UNIT</b>	mm		
<b>REV</b>	0		